


PERSA 225.







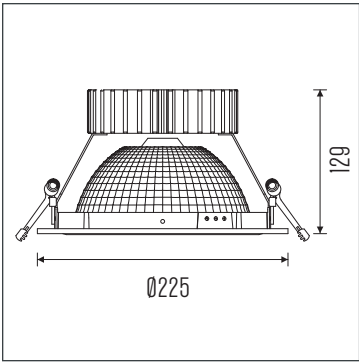






Cut-out	: Ø210mm	Optic	: Facet anodized aluminum reflector 50°
CCT	: 2700K - 5700K		
CRI	: (RA) >90, (RA) >97, (RA) >80	Mains voltage	: 220-240V / 50-60Hz
Chromaticity tolerance	: 3	Max. ambient temperature	: 35°C
Luminous flux	: max. 4700Lm	Ingress protection	: IP20
Connected load	: max. 38.5W	Net. weight	: 1.20Kg
System efficiency	: max. 145Lm/W	Warranty	: 5 years
Electrical Safety Class:	Class II		

PERSA 260.

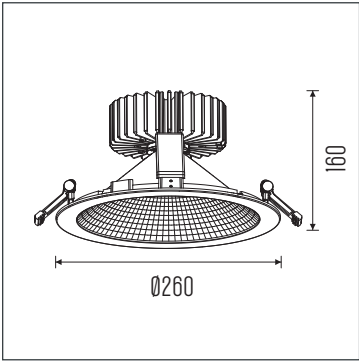











Cut-out	: Ø240mm	Optic	: Facet anodized aluminum reflector 80°
CCT	: 2700K - 5700K		
CRI	: (RA) >90, (RA) >97, (RA) >80	Mains voltage	: 220-240V / 50-60Hz
Chromaticity tolerance	: 3	Max. ambient temperature	: 35°C
Luminous flux	: max. 4700Lm	Ingress protection	: IP20
Connected load	: max. 38.5W	Net. weight	: 1.30Kg
System efficiency	: max. 145Lm/W	Warranty	: 5 years
Electrical Safety Class	: Class II		